



IMPROVED OLSR AND TORA ROUTING PROTOCOLS FOR MANETS

Dhriti Sharma, Harpreet Kaur

M.Tech ECE & BBSBEC, Fatehgarh Sahib, India

Assistant Professor ECE & BBSBEC, Fatehgarh Sahib, India

dhriti_98@hotmail.com, harpreet.mavi@bbsbec.ac.in

Abstract- A mobile ad-hoc network (MANET) is groundwork less system of movable devices associated by wireless links. Every device in MANET is unrestricted to move arbitrarily on any path and will therefore transform its links to new devices promptly and unpredictably. MANETs can interconnect with each other without the usage of a predefined arrangement or federal administration. In this paper routing protocols OLSR and TORA for mobile ad hoc network are evaluated on the base of delay, network load and throughput. This relative study confirms that Enhanced OLSR outperforms among all concerned protocols in terms of network load and throughput. An endeavour has also been made to alter the performance of both routing protocols.

Keywords- MANET, OLSR, TORA, ROUTING, OPNET

I. INTRODUCTION

MANET is a self-configuring system of movable nodes (and associated hosts) linked by wireless links—the amalgamation of which form a capricious topology. Research concerning MANETs is currently of great interest. The performance of MANET is related to the efficiency of the routing protocols in adapting to frequently changing network topology and link status [1]. Because of the importance of routing protocols in the dynamic multi hop networks, a number of routing protocols have been proposed in the last few years; concurrently, a great deal of research work is being undertaken by researchers to improve their performances. The nodes are unrestricted to move arbitrarily and consolidate themselves randomly; thus, the network's wireless topology may variates rapidly and unpredictably. The network topology is unstructured and nodes may arrive or leave at their will. A node can interchange statistics to other nodes which are within its transmission range. Such networks are malleable and suit numerous conditions and applications, thereby allowing the establishment of temporary communication sans pre-installed infrastructure [4]. Because of wireless interfaces narrow transmission range data traffic is transmitted over several transitional nodes to guarantee a communication connection between two nodes. A collection of wireless mobile nodes can vigorously establish the network in the absence of fixed groundwork [1]. Because of these features, routing is a serious issue and an competent routing protocol needs to be chosen to

make the MANET trustworthy [2]. The most popular routing protocols in MANET are AODV (reactive) and TODV (on-demand), OLSR (proactive) and TORA (on-demand). Reactive protocols find the routes when they are needed. On-demand protocols find a route on demand by flooding the network with route request packets. Proactive protocols are table driven protocols and find routes before they need it. In this paper, two MANET routing protocols OLSR and TORA are evaluated on the basis of various parameters: delay, network load, and throughput. The organization of the paper is as follows. Paper explain routing protocols in section II, related works are discussed in section III, section IV explains the simulation and performance metrics, section V explains the results of simulations and finally section VI concludes the paper.

II. MANET Routing Protocols

Mobile Ad-hoc Network (MANET) have various routing strategies with each category routing protocols [2]. MANET routing protocols are based on how routing information is acquired and maintained by the mobile nodes and thus, can be divided into proactive and reactive category. The routing protocols are as follow:

- 1) **OLSR**- OLSR is a proactive or table driven, link-state routing protocol. Link-state routing algorithms choose best route by determining various characteristics like link load, delay, bandwidth etc. Link-state routes are more reliable, stable and accurate in calculating best route and more complicated than hop count. To update topological information in each node, periodic message is broadcast over the network. Multipoint relays are used to facilitate efficient flooding of control message in the network. Route calculations are done by multipoint relays to form the rout from a given node to any destination in the network. The OLSR protocol is developed to work independently from other protocols. Conceptually, OLSR contain three generic elements: a mechanism for neighbour sensing, a mechanism for efficient flooding of control traffic, and a specification of how to select and diffuse sufficient topological information in the network in order to prove optimal routes [11]. OLSR performance relay on HELLO and TC messages. The (TC) messages used for continuous keep of the routes to all endpoints in the system, the protocol is very proficient for movement patterns where an enormous subset of nodes are interacting with other enormous subset of nodes, and where the [source, destination] pairs change over time.

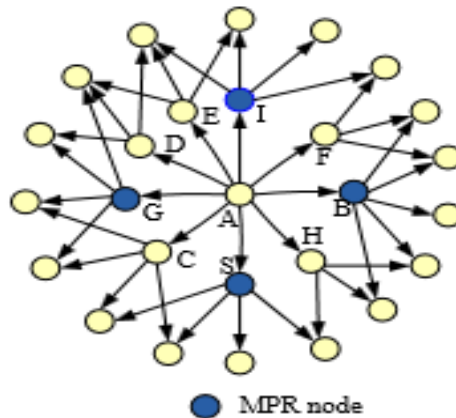


Figure 1 MPR nodes in OLSR

- 2) **Temporally Ordered Routing Algorithm (TORA)** The TORA uses a “flat”, non-hierarchical routing algorithm which enables it to achieve a high degree of scalability. In TORA, a route is selected based on associativity states of nodes. The routes thus selected are liked to be long-lived. All node generate periodic beacons to signify its existence. When a neighbor node receives a beacon, it updates its associativity tables. For every beacon received, node increments its associativity tick with respect to the node from which it received the beacon. Association stability means connection stability of one node with respect to another node over time and space. A high value of associativity tick with respect to a node indicates a low state of node mobility, while a low value of associativity tick may indicate a high state of node mobility. Associativity ticks are reset when the neighbors of a node or the node itself move out of proximity. The

fundamental objective of TORA is to find longer-lived routes for ad hoc mobile networks. The three phases of TORA are Route discovery, Route reconstruction (RRC) and Route deletion.

III. LITERATURE REVIEW

Robinpreet Kaur *et al.* conduct survey on the various routing protocols. In this paper an effort has been made on the comparative study of Reactive, Proactive and Hybrid routing protocols. The field of mobile ad-hoc networks is very vast and there are various challenges that need to be met, so these networks are going to have widespread use in the future [1].

P.Suganthi *et al.* have determined the performance of OLSR under different refresh intervals. Performance varies from time 2 seconds to set seconds. There is substantial redeemable in bandwidth which could be valuable in bandwidth reserved systems. Still when the 'Hello' interval is altered to 8 seconds, the output is natural which can cut the quality of facility provided. The entire goal is to improve the performance of OLSR which can be achieved by tuning the 'Hello' interval based on the type of network [2].

Durgesh Wadbud *et al.* implemented the secure AODV routing protocol. The paper discuss the performance of two protocols (SAODV and ARAN) was tested in simulation and their communication costs were measured using the NS-2 simulator, which was suitable for the present purpose [3].

Dilpreet Kaur *et al.* have done the Comparative Analysis of AODV, OLSR, and TORA. The paper concludes that as the mobility increases there is an improvement in the throughput of OLSR, DSR and DSDV. So these three protocols can be used in emergency and military applications [4].

Ekta Nehra *et al.* have done the Performance Comparison of AODV, TODV, OLSR and TORA using OPNET. OLSR performs best in terms of network load and throughput. AODV performs worst in terms of load and throughput. TORA's performance was consistently good in terms of load and throughput. TODV's performance was consistent for the three parameters. In summary, we can say that OLSR was best as compared to AODV, TODV, and TORA in type of traffic taken into consideration for simulation because of its maximum throughput [5].

Priyanka Dahiya *et al.* had performed experiment on QoS Based TORA Reactive Routing Protocol using OPNET 14.5 [7]. In this paper performance of Reactive TORA is evaluated for metrics like Network Load, Throughput, Delay, Upload and Download response time, TORA Control traffic sent and received by varying number of nodes and version of IEEE 802.11 WLAN Standard. From the above discussion it has find out that TORA small network performs best in each case in terms of Delay and Network load and TORA large Network perform best in each case in terms of Throughput.

IV. SIMULATION PARAMETERS AND PROPOSED WORK

TABLE I Simulation parameters

| | |
|-------------------------|---------------|
| Maximum Simulation Time | 600 seconds |
| Environment size | 100*100 meter |
| No. of nodes | 75 |
| Routing Protocol | OLSR and TORA |
| Hello interval | 1 |
| TC messages | 2 |
| MPR | Energy base |
| Data Rate | 1 Mbps |
| Packet size | 1024 bytes |
| Speed | 10 m/s |

| | |
|--------------------|---------------|
| Traffic type | FTP |
| Trajectory | Handover move |
| TTL (time to live) | Defined |

The aim of proposed work is to enhance the performance of OLSR and TORA routing protocol. The altering of control interval values done for OLS for its unsurpassed performance. The values of control interval are optimally used considering the factors like distance, power and global cost. The routing of TORA routing protocol is not based on shortest path selection but based on stable path selection, as the result it decline the overall performance of routing. The long paths are followed based on stability consequences in more energy consumption and network span is shorten. So, in our proposed approach the routing of TORA is based on energy oriented routing. The node with highest residual energy is selected for forwarding the packets. The scenarios are designed using OPNET-14.5. The simulation results had shown improvement in performance of both routing protocols in compare with their original versions.

V. RESULTS AND DISCUSSION

- A. Delay-** Delay represents the end to end delay of all the packets received by the wireless LAN MACs of all WLAN nodes in the network and forwarded to higher layer. This delay includes medium access delay at the source MAC and reception of all fragments individually. The delay for OLSR and TORA is represented in figure 3, the delay of TORA routing protocol for both default and tuned version is much higher than of OLSR. The tuned OLSR is better in term of delay.

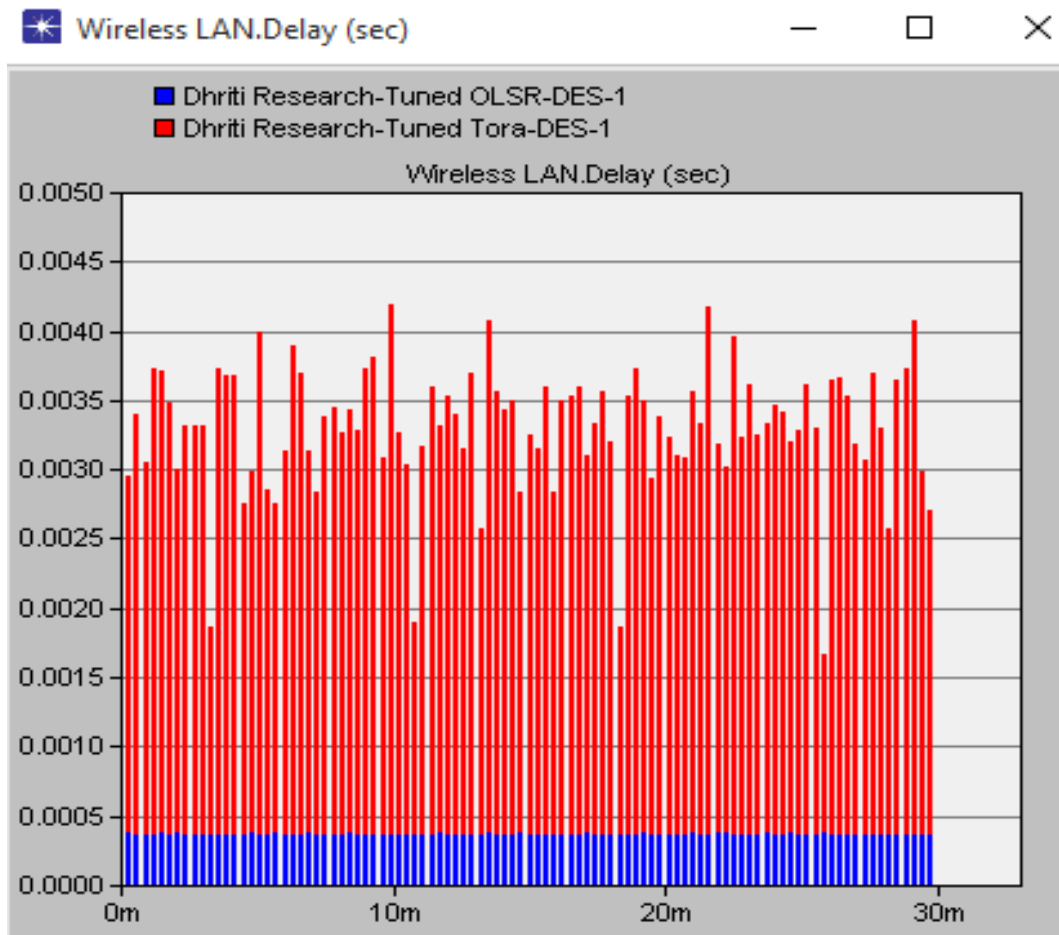


Figure 2 OLSR and TORA Delay

B. Medium Access Delay- The medium access delay is higher for TORA in comparison with OLSR routing protocol. The performance of improved OLSR is better than original OLSR. The delay shown by all versions is very less, which had less significance.

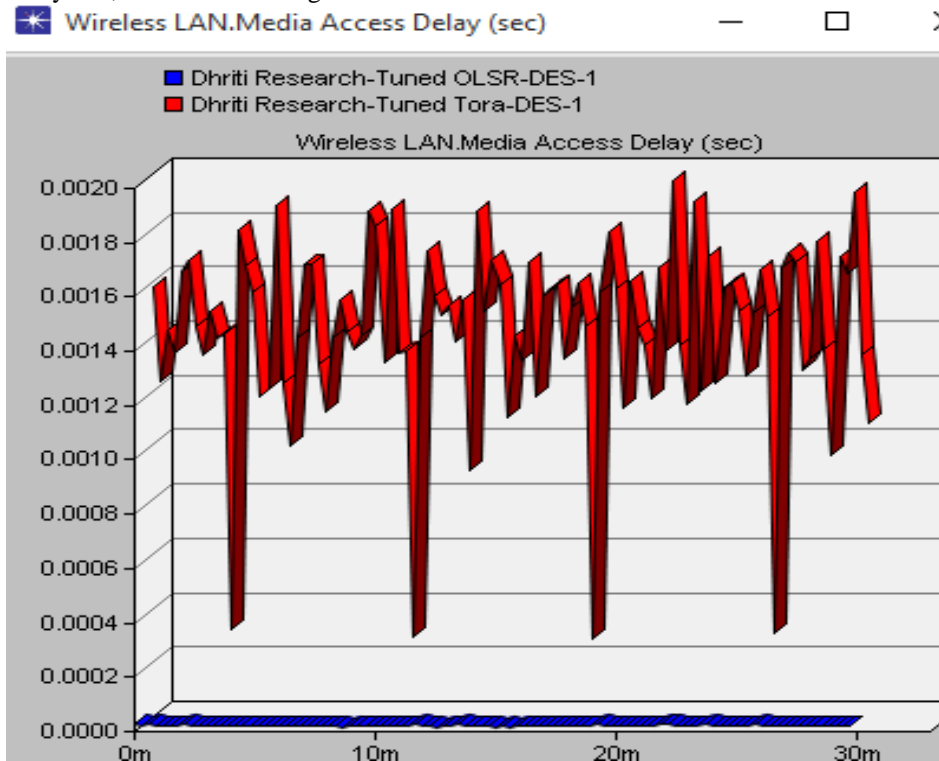


Figure 3 OLSR and TORA Medium Access Delay

C. Load- The load of OLSR is much higher than TORA. The load depends on the number of packets in the network. The higher load may result in network congestion sometime, which is not desirable. The proposed network is not under congestion as its throughput is also higher.

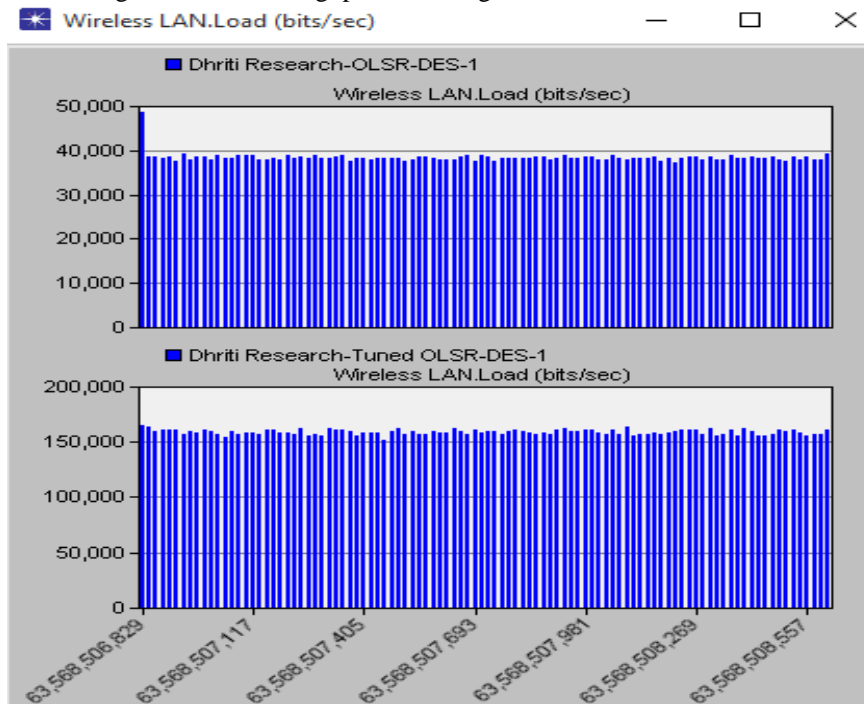


Figure 4 OLSR and TORA Load

- D. Throughput-** The proposed OLSR is best in terms of throughput. The OLSR shows the maximum throughput, whereas TORA throughput is quite low in compare with OLSR and proposed OLSR. The proposed TORA throughput is higher than normal TORA.

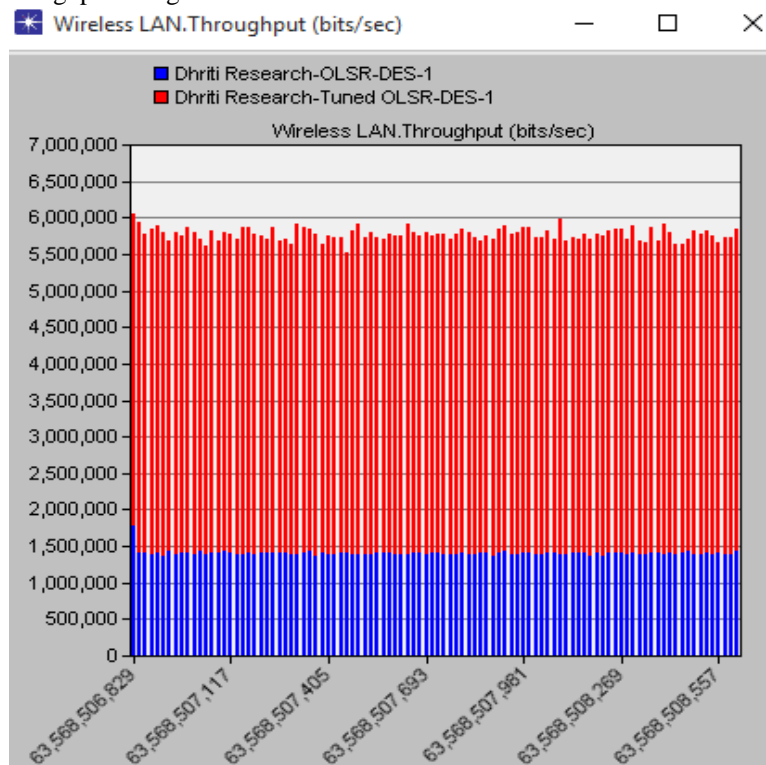


Figure 5 OLSR and TORA Throughput

VI. CONCLUSION

The simulation study has shown that OLSR is better performer than TORA. The proposed TORA perform better than original TORA version, which indicate that energy routing for TORA suits the network. The tuned OLSR perform much better than OLSR, in proposed work the control values are adjusted along with selection of forwarder on basis of power, distance and stability. The proposed approach shows much better results for tuned OLSR in comparison with OLSR. The throughput of tuned OLSR is much higher than OLSR. The proposed routing for OLSR and TORA is efficient and reliable too. The reliability makes the protocols trustworthy, which has high impact on throughput.

REFERENCES

- [1] S. Mahajan and V. Chopra, "Performance Evaluation of MANET Routing Protocols with Scalability using QoS Metrics of VOIP Applications," *Int. J. Adv. Res. Comput. Sci. Softw. Eng.*, vol. 3, no. 2, pp. 150–156, 2013.
- [2] A. Hinds, M. Ngulube, S. Zhu, and H. Al-Aqrabi, "A Review of Routing Protocols for Mobile Ad-Hoc NETworks (MANET)," *Int. J. Inf. Educ. Technol.*, vol. 3, no. 1, pp. 1–5, 2013.
- [3] Anjali and M. Singh, "Simulation and Performance Analysis of AODV , OLSR , GRP Routing Protocol by considering IEEE 802 . 11Standard," *Int. J. Adv. Res. Comput. Sci. Softw. Eng.*, vol. 2, no. 6, pp. 171–178, 2012.

- [4] S. A. Ade and P. A. Tijare, "Performance Comparison of AODV , DSDV , OLSR and DSR Routing Protocols in Mobile Ad Hoc Networks," *Int. J. Inf. Technol. Knowl. Manag.*, vol. 2, no. 2, pp. 545–548, 2010.
- [5] J. Singh and N. Dhiman, "A Review Paper on Introduction to Mobile Ad Hoc Networks," *Int. J. Latest Trends Eng. Technol.*, vol. 2, no. 4, pp. 143–149, 2013.
- [6] R. Kaur, M. T. Student, C. Sharma, and P. D. Candidate, "Review paper on performance analysis of AODV , DSDV , OLSR on the basis of packet delivery," *IOSR-Journal Comput. Eng.*, vol. 11, no. 1, pp. 51–55, 2013.
- [7] A. K. Gupta, H. Sadawarti, and A. K. Verma, "Review of Various Routing Protocols for MANETS," *Int. J. Inf. Electron. Eng.*, vol. 1, no. 3, pp. 251–259, 2011.
- [8] A. Gill and C. Diwaker, "Comparative Analysis of Routing in MANET," *Int. J. Adv. Res. Comput. Sci. Softw. Eng.*, vol. 2, no. 7, pp. 309–314, 2012.
- [9] M. A. Mostafavi, A. Akbari Moghanjoughi, and H. Mousavi, "A Review and Performance Analysis of Reactive and Proactive Routing Protocols on MANET," *Netw. Commun. Technol.*, vol. 1, no. 2, pp. 48–58, Oct. 2012.
- [10] V. . Patil, "Reactive and Proactive Routing Protocol Performance Evaluation for Qualitative and Quantitative Analysis in Mobile Ad Hoc Network," *Int. J. Sci. Research Publ.*, vol. 2, no. 9, pp. 1–8, 2012.